

Overview

Commands are configuration elements used to describe plugins usage.

It tells Shinken Enterprise where to find plugins, how to use it, what arguments are necessary, and how to substitute arguments by Data.

For example, **check_ping** is a plugin used to ping a host, and get informations about network connectivity with host :

```
check_ping -H <host_address> -w <wrta>,<wpl>% -c <crta>,<cpl>%
```

Plugin help tells that to use the command, we need to pass, as argument the following :

- -H : host address
- -w : wrta,wpl (Warning Round Trip Average, Warning Packet Loss)
- -c : crta, cpl (Critical Round Trip Average, Critical Packet Loss)


The corresponding commands should be :

```
check_ping -H $HOSTADDRESS$ -w $ARG1$ -c $ARG2$
```

In this way, Shinken Enterprise will be able to replace arguments by the corresponding value, depending of HOSTADDRESS and arguments given to command.

Accessing Commands configuration

Commands Configuration can be accessed by the Main Menu "Commands".

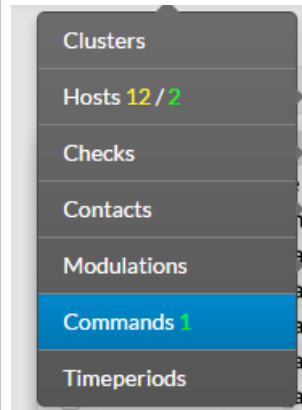

When accessing the Commands Configuration Page, a Command Table is displayed, listing all Commands objects.

On the top of the table, A tool bar let Administrators the ability to :

- Enable, Disable, Delete or Duplicate selected Commands
- Filter list by Name

Commands >				
Action:	Launch	Filter by name:		
Differences Name	Poller Tag	Reactionner Tag	Pack	Status
<input type="checkbox"/> bp_rule	None	None		Enabled

This table contains the following informations :

- A check box to select one or more commands
- Differences
- Name
- Poller Tag
- Reactionner Tag
- Pack
- Status

This page also provides, on the left, an action Menu, used to :

- Add a new Command
- Show Commands detected by Automatic Modules
- Accept differences on selected elements

Create a new Command

To create a new Command, use the button "Add new [Command]" located in the Action Menu

+ Add New [Command]

Detected by Automatic Modules

 No new element

 Accept selected differences

Command creation form will be displayed.

This form is composed of tabs, corresponding to categories of properties :


- Generic
- Advanced

The left menu give to Administrators the ability to :

- Validate the new Command
- Cancel the action
- Delete the Command

 Validate

 Cancel

 Delete

For each category, a corresponding form is displayed.

Generic

Generic properties contains the minimum properties required to create a Command :

- **Name**
 - the name of the Command
 - this field is **required**
- **Command**
 - the plugin configuration
 - the value is a text field, defining the plugin syntax (see example in Overview)

Command > check-host-alive		Value
Generic*	Property	
	Name *	check-host-
Advanced	Command *	\$NAGIOSPL

Advanced

Advanced properties are used to define Advanced features like :

- **Monitored from**
 - the poller tag that the command should run on
- **Module Type**
 - the poller module the command should run in the poller daemon

Command > check-host-alive	
Generic*	Property
	Monitored from
Advanced	Module type

Modify a command

To modify properties of a command, first go on the Commands page, from the Main menu, then click on the command name you want to modify.

<input type="checkbox"/>	check-host-alive
--------------------------	----------------------------------

The form displayed is the same as the form used to create a new Command.

All fields are filled with Command properties.

✓ Validate
← Cancel
✕ Delete

Once changes have been made, configuration of the Command must be saved by clicking the Validate button available on the left menu. Cancel button rev

Delete a command

To delete a command, you can use the form of the command, or delete it directly from the list page.

From the Form page

First go to the Commands page, from the Main menu, then click on the command name you want to delete.

Once in the page displaying the form, click on the Delete button available on the left menu.

A confirmation popup will be displayed.

✓ Validate
← Cancel
✕ Delete

From the Main page

First go to the Commands page, from the Main menu, then click on the check box placed on the first column of the table.

Use the **Action** menu on the top to select **Delete**, and click to the **Launch Button**.

A confirmation popup will be displayed.

Using the Main page gives Administrators ability to **Delete** many Commands at once.

Commands >

Action: Delete [1]

<input type="checkbox"/>	Differences	Name
<input type="checkbox"/>		bp_rule
<input checked="" type="checkbox"/>		check-host-alive
<input type="checkbox"/>		check_aix_cpu

Duplicate a command

Duplication operation is very useful when similar Commands must be added.

To duplicate a command, first go on the Main page listing all commands, then select a command by clicking on the check box placed on the first column.

Once selected, the command can be duplicated by selecting **Duplicate** in the select **Action** of the tool bar.

Duplication is executed by clicking the **Launch** button.

check-host-alive

Commands >

Action: Duplicate [1]

<input type="checkbox"/>	Differences	Name
<input type="checkbox"/>		bp_rule
<input checked="" type="checkbox"/>		check-host-alive
<input type="checkbox"/>		check_aix_cpu

The name of command duplicated is suffixed by "(copy)"

Commands >

Action:

<input type="checkbox"/>	Differences	Name
<input type="checkbox"/>		bp_rule
<input type="checkbox"/>		check-host-alive
<input type="checkbox"/>		check-host-alive (copy)
<input type="checkbox"/>		check_aix_cpu

Using the Main page gives Administrators ability to **Duplicate** many Commands at once.

All properties are kept when duplicating operation, as well as data.



Duplicated commands are totally detached and independent of the cloned command.

No relation is made in the configuration.