


UI Visualisation Improvements

Table of content

- UI Visualisation Improvements
 - HOST DETAIL PANEL
 - Table of content
 - DASHBOARD
- Configuration UI Improvements
 - MENU
 - Home page
 - Elements Page
 - To be applied Page

HOST DETAIL PANEL

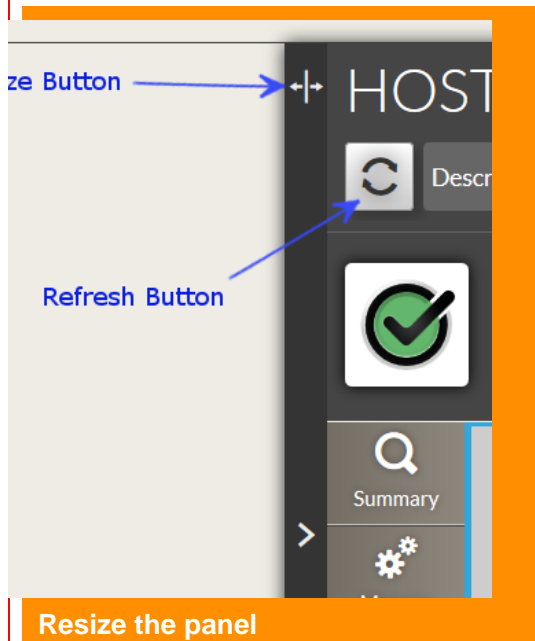

Resize the panel

You can resize the panel to display more information.

- Drag the Resize Button to change the size.
- If the Resize Button becomes red, it indicates that you have reached the maximum size.

Refresh button

The detail panel is now linked to the dashboard refresh.

- Each minute, both (Panel + Dashboard) will be refreshed (if the automatic refresh of the dashboard is activated).
- But we also added a Refresh Button on the detail panel to force an instant refresh.

Checks Tabs completely modified

The previous checks tree has been replaced by a list.

You can:

- Sort it (multi-column sort).

Context	Status	Name	Last Chec...	Output	Actions
Nothing...		Type a name	&	Type an output	&
<input checked="" type="checkbox"/>		Disks Stats	5m 52s	Traceback (most recent call last):	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		Load Average	5m 52s	Warning: load average is very high 1.59,0.37,0.14	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		NFS Stats	5m 52s	Error: something goes wrong during the command launch sorry	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		TCP States	5m 52s	OK	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		Disks	5m 52s	Ok: all disks are in the limits	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		Read-only Filesystems	5m 52s	OK: no read only file system	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		SSH Connexion	5m 52s	OK: connexion is good	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>		NtpSync	5m 52s	Error: /usr/sbin/ntpq: read: Connection refused	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>

- Filter it.
- Select some or all checks to make mass action (Recheck, set Acknowledge, view graphs...).

Display of the time difference between user computer and Shinken Enterprise

In the Manage tab,

- A warning box will be displayed if there is a difference of more than 30 secondes between your web browser and the backend server.
- Especially for setting a downtime, it is important to know that such difference exists. We would advise you to set the real time either on your computer or on the backend server.

Backend local time has gap of more than 30 seconds (11minute 7second)

Schedule downtime | Submit check result | Acknowledge | Recheck now

Downtime: No downtime set for this host

HOST [Shinken Arbiter]

Description : Shinken Arbiter

Last Check: 1minute 35second ago

Next Active Check: in 2minute 42second

Recheck now | Remove Acknowledge


Set by admin | 10/01/2015 - 6:04 PM

Output: check_ping: Invalid hostname/address - localhost

information on an Acknowledge

Under the Remove Acknowledge button, additional information are displayed:

- The name of the user who set the acknowledge.
- When the acknowledge has been set
 - when you put the mouse over this area, a hover black box will display the full detail of the acknowledge.

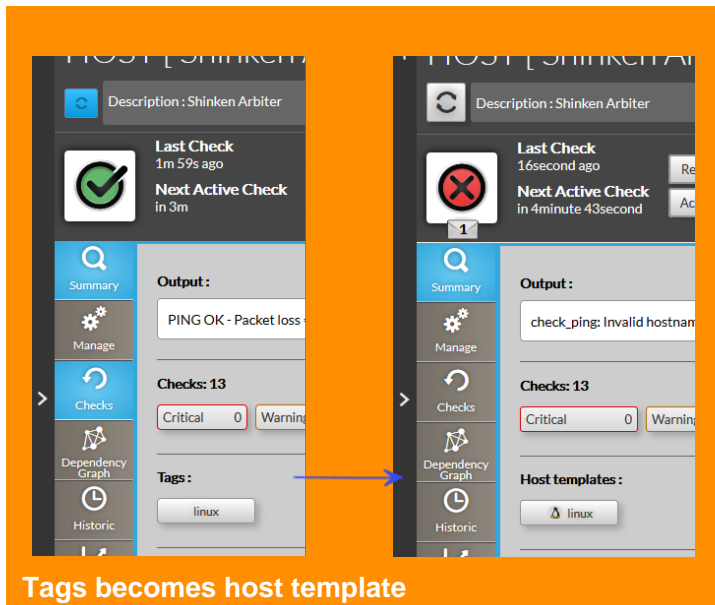

In all UI, "tags" has been renamed "host templates".


DASHBOARD

Direct connection between widget and Host Detail View tabs.


- In Status widget configured on a host:
 - Clicking on a box displaying the number of checks in a status, will directly open the detail view on the Checks Tab.
 - The checks list will be directly filtered on this status type. Of course, you can remove this filter.
- In Graphics widget:
 - Clicking on the title will open the detail view on the Graphics tabs.
 - The graphics tabs will automatically select the metric configured in the widget and display the graph.
- In Dependency Graph widget:
 - Clicking on the title will open the detail view on the "Dependency Graph" tab.
- In SLA widget:
 - Clicking on the title or inside the widget will open the detail view on the "Historic" tab.

Resizable Widget (Dependency graph, Graphics and Web page).

- To resize widget, enter in edit mode
- Resizable widgets are surrounded by a blue border.
 - Place your mouse on the border of the widget. The cursor will change.
 - Drag the border to the expected size.
 - Each widget has a minimum size.

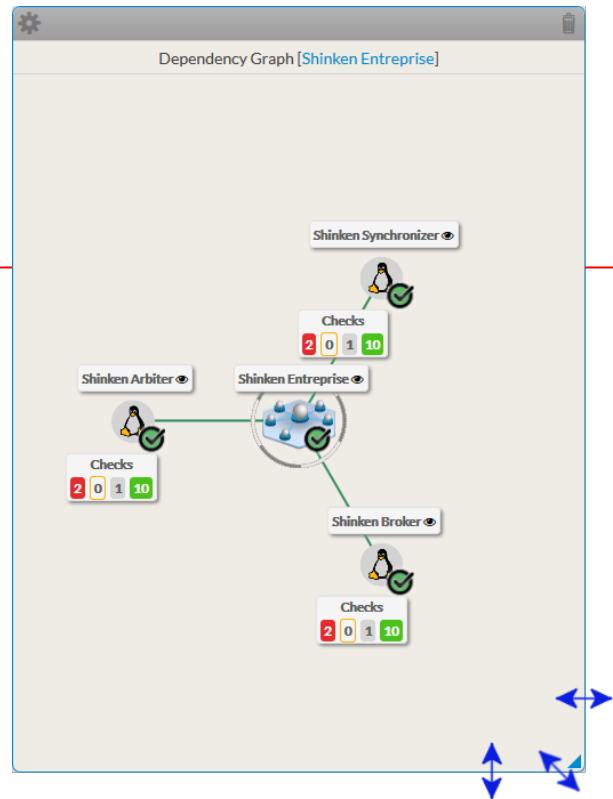

The background color of the Dashboard Title is now the same as the Dashboard Group

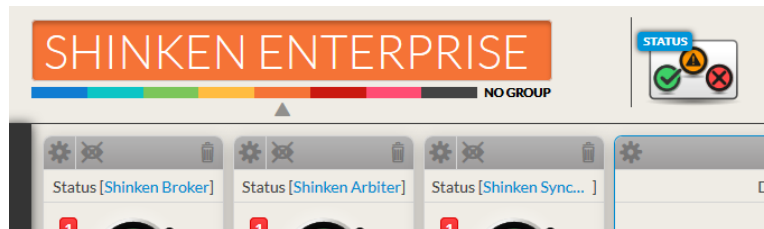

In edit mode, Widgets order has been changed

It has been sorted by usage frequency:



- Status
- SLA
- Dependency Graph
- Root Problems
- Graphs
- WebPage
- 360

Configuration UI Improvements


MENU

To improve the efficiency of the Configuration UI, the menu bar will provide more dynamic information.

Menu APPLY => To be applied [Validated: X]

Now the menu entry "apply" is changed into "To be applied [Validated: X]".

- X indicates the number of new elements or modifications that can be applied to the production database.
- The "to be applied" is automatically refreshed
 - every 30 seconds to inform you of any update on the configuration by your co-workers.
 - or after any modification you validate in the Configuration UI.
- If there are no modifications, the entry menu is darkened and not clickable.



- 2 entries have been removed, Sources and discovery pages content are now directly accessible in the home page. No need to have them in the menu anymore.

The "Elements" menu displays the number of new /change automatically detected by sources modules

Once configured, sources modules will gather potentially additional information on existing hosts or discover new hosts.

- On the Elements menu, the total number of new/changed elements are displayed.
 - When you enter in sub-menu, number of new/change will be displayed by element's type.
- These numbers are automatically refreshed when you reload a page.

▼ Elements : New [23] / Difference [1]

in next release, this menu will also be refreshed every 30 seconds

Home page

The configuration home page now offers a summary of your current Staging configuration. It also shows new/changed elements that were detected by the automatic modules, so you can validate them.

- The home page is automatically refreshed every 30 seconds.
- Elements summary table is added (number of elements, automatically detected new and modified elements)
 - Element's Type name are now hyperlinks.
 - Clicking on it will display the list page of this element's type.
- It displays the list of Automatic Detection Modules.

- The fact that a **Source** is enabled is now differentiated from its status (running well or not, for example):
 - 2 columns (Enabled and State) are now present.
 - A source can be Enabled or not in its configuration file (cf module description in the chapter [Automatic +Detection+modules](#)).
 - State column is filled if the source is enabled.

Automatic Detection Modules				
Sources >				
Name	Enabled	State	Last synchronization	Output
discovery	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	58s ago	OK: discovery data load successfully
cfg-file-shinken	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	41s ago	OK: load successful from configuration file /etc/shinken/local-import.cfg
cfg-file-nagios	<input type="checkbox"/>		N/A ago	
active-dir	<input type="checkbox"/>		N/A ago	
sync-vmware	<input type="checkbox"/>		N/A ago	

Taggers >		
Name	Modules	Order
ip-tags	ip-tag-dmz	1
regexp-tags	sync-regexp-tag	1

- Buttons (Add host, Show hosts, Show sources) on the home page were useless and have been removed.

Elements Page

Global Layout modification

Huge improvements in the Elements page:

They are now more clear and dynamic.

The screenshot shows the Shinken Enterprise web interface. At the top, there's a navigation bar with 'Home', 'Elements', and 'Admin' buttons. Below it, a sidebar contains 'Validate', 'Cancel', and 'Delete' buttons. The main area displays the configuration for a host named 'Shinken Arbitrator'. The configuration is presented in a table with columns for 'Property' and 'Value'. The 'Value' column shows default or inherited values, such as 'Shinken Arbitrator' for the name, 'localhost' for the address, and 'True [default]' for the enabled status. A legend on the right side explains the visual cues: a red star indicates a mandatory field, and purple text indicates an inherited value from a template. The interface is clean and modern, with clear labels and intuitive controls.

- The Cancel button has been added (to clearly indicate to the user how to leave the page without taking into account modification done in the element)
- Configuration is now far more natural: If a property value is not set in the element, default or template inherited values of element's fields are now displayed. They are colored in purple.

- Mandatory fields are pointed out by a red star near to the label.

Realm All [default] ▼

✓ Validate

← Cancel

✕ Delete

- The type and the name of the element are always displayed on the top of the page.

Host > Shinken Arbiter

Name *

- For elements that can have templates to inherit from (hosts, checks, contacts):

- Template values will be shown on the right of the value property.
- Inherited Template values will be used only if the property is not set in the element (in the example, Business impact is set to 2, so the inherited value 1 from Shinken Host is displayed but not applied)
- Adding/removing a template will automatically recompute all the inherited property with the value.

Business impact 2 | 1 [In template Shinken Hosts]

- A help window for each property field is displayed on the right of the screen. Hovering the property will automatically fill the help area if help text is available for the property.

Help [Description]

This directive is used to define an alternate name that should be displayed in the web interface for this host. If not specified, this defaults to the value you specify for the host_name directive.

Improvement too, on List pages displaying all elements of a type:


- Automatic changes proposal are now easier to see. Buttons design changed by separating;
 - the button to add a new elements and the button to see/validate differences from the automatic detection modules.
 - for both button, text and color buttons will change if Automatic Modules detected updates.
 - Buttons are gray and inactive:

Detected by Automatic Modules


👁 No new element

✓ No selected differences


- Button "No New element" has been replaced by "see new hosts [X]" and is now yellow

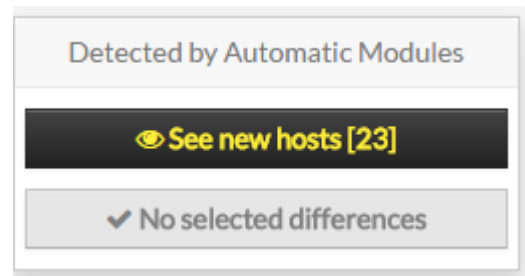

- Button "No selected differences" has been replaced by "See proposed differences (X elements)" and is now green:



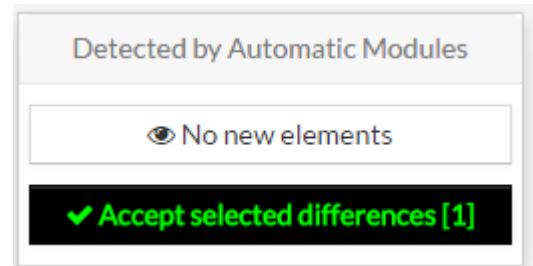


- Massive actions are now available on elements.

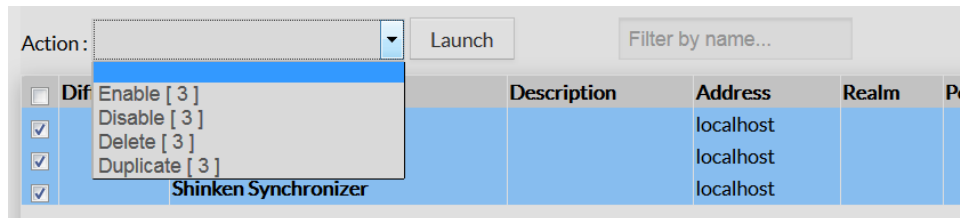

- All elements can now be selected (only the elements with automatic changes proposal were selectable before)
- massive actions can now be launched:
 - *Enable*: allow the element to be send in the monitoring production environment.
 - *Disable*: do not send this element to the production environment.
 - *Delete*: delete this element from the Staging database.
 - *Duplicate*: create a clone of the element with all its property, and the "(copy)" suffix at the end of its name.

- New filters are also available:
 - All pages now have a filter by name option.
 - Depending on the type of the element, more filter are available.
 - Host: filter by template
 - Checks: filter by template and filter by pack
 - Contacts: filter by template



Clusters/Cluster Pages

Now the clusters have their own list and edition page. They are separated from the hosts page.

They can have a name, a definition rule and the same notification options as the hosts.

Note: A cluster can't be named with a name already used by a cluster or by a host.

Host/Host template Pages

The host page inherit from the global layout modification (default and template display, ...) and have also special improvements:

- In the generic tab, when you link a template to your host, the numbers of checks linked to a template are shown aside the template name.
- Checks linked to your templates are also displayed in a specific "Checks [X]" tab
 - where X is the total number of checks this host will inherit.
 - you can see the checks name, their contact groups, the check command
 - You can also click on "try this check" button to launch a check on this host. You will see:
 - the command (definition and expanded command line),
 - the data used to launch the check command,
 - the return from the plugin execution

Host Templates to inherit

linux [12 checks] x

From linux [12 checks]					
Name	Contacts Groups	Host Templates	Command	Try this check	
CPU Stats	[Same as host]	linux	check_ssh_linux_cpu_stats		▶
Disks	[Same as host]	linux	check_ssh_linux_disks		▶
Disks Stats	[Same as host]	linux	check_ssh_linux_disks_stats		▶
Kernel Stats	[Same as host]	linux	check_ssh_linux_kernel_stats		▶
Load Average	[Same as host]	linux	check_ssh_linux_load_average		▶
Memory	[Same as host]	linux	check_ssh_linux_memory		▶
NET Stats	[Same as host]	linux	check_ssh_linux_net_stats		▶
NFS Stats	[Same as host]	linux	check_ssh_linux_nfs_stats		▶
Read-only Filesystems	[Same as host]	linux	check_ssh_ro_filesystem		▶
Reboot	[Same as host]	linux	check_ssh_linux_uptime		▶
SSH Connexion	[Same as host]	linux	check_ssh_connexion		▶
TCP States	[Same as host]	linux	check_ssh_linux_tcp_states		▶

Note: For "Try this check", checks are launched on the Synchronizers, not on Pollers, so make sure that all plugins are as well configured as on Pollers.

- a new field "Checks to exclude" is available in the advanced tab.

It's a comma separated list of Check names you do not want to be present in this specific host.

Checks to exclude

Disks Stats,Kernel Stats [In temp

Disks Stats,Kernel Stats [In template Shinken Hosts]

Check/Check template Pages

The check page inherit from the global layout modification (default and template display, ...) and have also special improvements:

- Properties to link checks to hosts, hostgroups and host templates are now with explicit labels.
 - Check Templates to inherit
 - Apply on Host Groups
 - Apply on Host Templates

Check Templates to inherit

mssql-service x

Apply on Host Groups

Apply on Host Templates

mssql

- The "Duplicate for each host data" parameter was added to the "Monitoring" tab.

- The "Definition order" parameter was added to the "Advanced" tab.

Duplicate for each host data

Definition order

100 [default]

To be applied Page

The "To be applied" page did have several improvements. The focus is to facilitate and allow the user to easily see the main differences between its staging database and the production database:

- Modifications to apply to the production environment are listed:
 - The new, changed and removed elements are automatically displayed on the page right panel.
 - For new element, or changed elements, clicking on the name will directly open the element page.
 - On the changed elements:
 - The full list of changed property are displayed per element
 - you can unfold all diff tables of your elements if you want, or unfold it one element by one element

Command [1] +

Elements

New [1]

Host [1]

JIRA (host)

Changed [1]

Command [1] -

check_aix_disks - (command)

Key	Previous	New
	\$PLUGINS_DIR/check_snmp_storage.pl	\$PLUGINS_DIR/check_snmp_storage.pl
	-H \$HOSTADDRESS\$ -C	-H VVVV \$HOSTADDRESS\$ -C
command_line	\$_HOSTSNMPCOMMUNITY\$ -m / -f -w \$_HOSTSTORAGE_WARN\$ -c \$_HOSTSTORAGE_CRIT\$ -S0,1	→ \$_HOSTSNMPCOMMUNITY\$ -m / -f -w \$_HOSTSTORAGE_WARN\$ -c \$_HOSTSTORAGE_CRIT\$ -S0,1


Removed [1]

Service [1]

Dhcp (tpl) (check)

- You can filter the modifications list by using the two filters located in the left panel:
 - Filter by Status (new, changed, removed)
 - Filter by Type (host, checks, command,). Only the type with elements will be display on this filter.
 - Both status and type filter can be applied, to only see "new hosts" filter for example



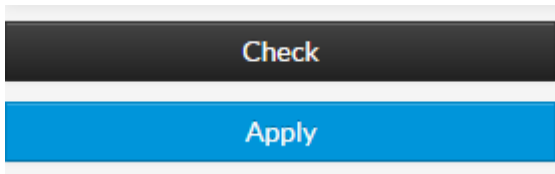

- Only two buttons are now available on the left:
 - Check: check the current staging database
 - Apply:
 - will check the current staging database,
 - erase the production database with the staging database,
 - Reload your monitoring production daemons.

Status >	
All	
New Elements	[1]
Changed Elements	[1]
Removed Elements	[1]
Type	
All	
host	[1]